





For Start & Stop activation for electric vibrators

- For 1 or 2 units single phase 230V AC 50/60 HZ NEA Vibrators
- For 1 or 2 units three phase 400V AC 50/60 HZ NEG Vibrators
- Can not be used for motor-protection

Technical Data

Product Type	Direct On-line enclosed motor starter
Motor Starter Type	Non-reversing
Device Composition	Contactors
Enclosing Material	Polycarbonate
IP Enclosure Class	IP657 according to IEC 60529
Ambient Temperature	-5° C to +40° C
Operation	1 piece red push-bottom "O" for stop/reset 1 piece green push-bottom "I" for start
Cable Entries	2 x 13 mm PG in bottom 2 x 16 mm PG in bottom 2 x 20 mm ISO in bottom 2 x 20 mm ISO on top
Conformity Standard	RoHS EUR 0817 EN 60947, IEC 60439-1, IEC 60947-4-1, VDE 0660-102

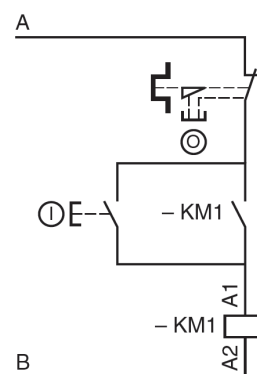

Product No.	Power Rating 50/60 HZ	Max. Current [A]	Enclosure Size (Width x Height x Depth) [mm.]	Weight [Kg.]
83199300	3x 400V~	9	88 x 166 x 128,5	0,92
83199301	3x 400V~	12	88 x 166 x 128,5	0,92
83199302	3x 400V~	18	101 x 201 x 153,5	1,015
83199303	3x 400V~	25	101 x 201 x 153,5	1,015
83199304	3x 400V~	35	101 x 201 x 153,5	1,015
83102050	1x 230V~	9	88 x 166 x 128,5	0,92